


TYPE OF OVEN	A	B	C	D	E	TOTAL LAYOUT
IDOC-S8	2330	2930	2300	8000	5000	13000 x 2500 x 2930
IDOC-S10	2330	2930	2300	10000	5000	14000 x 2500 x 2900
IDOC-S12	2330	2930	2300	12000	5000	17000 x 2500 x 2900

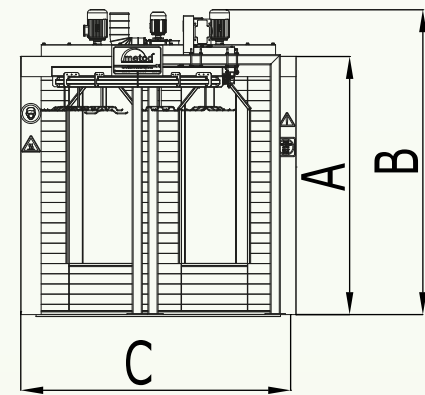

SPECIFICATIONS	IDOC-S8	IDOC-S10	IDOC-S12
MODEL	IDOC-S8	IDOC-S10	IDOC-S12
10-12 Onz Denim Pants Per Load / With Hanger (Apparatus)	6.000 pcs pants/24 hours (based on 20 min.) / The capacity will be 50% less with Hanger	8.000 pcs pants/24 hours (based on 20 min.) / The capacity will be 50% less with Hanger	10.000 pcs pants/24 hours (based on 20 min.) / The capacity will be 50% less with Hanger
Max. Electricity Consumption Per Hour	10-12,5 kw/h	12,5 - 15 kw/h	15 - 17,5 kw/h
Max. Natural Gas Consumption Per Hour	15 m ³ /h	21 m ³ /h	26 m ³ /h
Total Heat Circulation Fan Capacity	10.000 m ³ /h - 5,5 kw/h	10.000 m ³ /h - 5,5 kw/h	13.000 m ³ /h - 7,5 kw/h
Burner and Origin	Uret Gas Burner / Turkey	Uret Gas Burner / Turkey	Uret Gas Burner / Turkey
Max. Oven Temperature	180 °C	180 °C	180 °C
Temperature Controller	Thermostate Control	Thermostate Control	Thermostate Control
Materials	Firing Unit : Entirely Stainless Steel Other : Galvanized Sheet Metal	Firing Unit : Entirely Stainless Steel Other : Galvanized Sheet Metal	Firing Unit : Entirely Stainless Steel Other : Galvanized Sheet Metal
Hanger Type / Quantity	50 T-Type Conveyor Hangers - 3 jeans for each hanger (150 pcs garments)	55 T-Type Conveyor Hangers - 3 jeans for each hanger (165 pcs garments)	60 T-Type Conveyor Hangers - 3 jeans for each hanger (180 pcs garments)
Conveyor Type / Colour	Webb Type I-Beam Conveyor / Grey	Webb Type I-Beam Conveyor / Grey	Webb Type I-Beam Conveyor / Grey
Conveyor Length / Inside of the Oven	28.000 - 30.000 mm / 17.000 mm	31.000 - 33.000 mm / 21.000 mm	35.000 - 47.000 mm / 25.000 mm
Burner Control	Data Control	Data Control	Data Control
Speed Range of the Conveyor	0.5 - 3.5 mt. / min.	0.5 - 3.5 mt. / min.	0.5 - 3.5 mt. / min.
Homogeneity	Max. ±3°C between bottom and top of the garment. It is shown to the customer with computerised system.	Max. ±3°C between bottom and top of the garment. It is shown to the customer with computerised system.	Max. ±3°C between bottom and top of the garment. It is shown to the customer with computerised system.
Certificate	CE	CE	CE

The above values are not stable and can be changed on Project basis. Yukarıdaki değerler sabit değildir ve Proje bazında değişebilir.